

## > CALYPSO XL

**Calypso XL** coverage of big residential plants or commercial applications for collective leisure, restauration, lodging facilities.



\*



### > RANGE

**Vertical** wall-hung: 150/200  
(copper/opt. steatite\*)

**Horizontal** wall-hung :150/200

**Floor standing** 200/250/300  
(copper/opt. steatite\*)

### > VOLTAGE

Standard one phase.

Model 300/copper also 240/300 V3

Tension 50/60Hz

### STANDARD FEATURES

As per standard product



5 BOLTS FLANGE



HIGH LIQUID INTRUSION PROTECTION



BLUE SILICON ENAMELLING



OPERATING LIGHT



OVERSIZE THERMAL INSULATION



HEAVY-DUTY THERMOSTAT



NYLON DIELECTRICS

- 1 On floor standing models and steatite wall-hung
- 2 On floor standing models

### EXTRA FEATURES

Further customization is possible on factory-tailored production lots




HIGHER POWER




POWER CABLE AND PLUG

## > DIMENSIONS



> Vertical

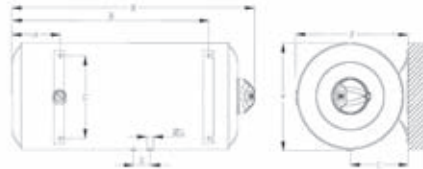

> Horizontal



> Floor standing

- > Max. operating pressure: 6 bar
- > Insulation thickness: 33 mm
- > Voltage: 220~240 V 50 Hz

## > TECHNICAL DATA

WALL-HUNG EXECUTION			VERTICAL		HORIZONTAL	
			150 V	200 V	150 H	200 H
Dimensions	X	mm	565	565	989	1253
	Y	mm	989	1253	565	565
	Z	mm	592	592	592	592
	A	mm	195	195	195	195
	B	mm	771	1035	771	1035
	C	mm	440	440	265	265
	D	mm	230	230	140	140
	E	mm	175	175	310	310
	F	mm	-	-	340	595
	G	inches	3/4"	3/4"	3/4"	3/4"
Capacity		litres	150	200	150	200
Power		W	2400	2400	2400	2400
Heating time	$\Delta T$ 35° C	minutes	2 h 42'	3 h 36'	2 h 42'	3 h 36'
	$\Delta T$ 45° C	minutes	3 h 28'	4 h 38'	3 h 28'	4 h 38'
Weight*		Kg	42	51	42	51

FLOOR STANDING EXECUTION			200 BAS	250 BAS	300 BAS
Dimensions	X	mm	565	565	565
	Y	mm	1293	1524	1755
	Z	mm	650	650	650
	A	mm	997	1235	1508
	B	mm	268	268	268
	C	mm	323	323	323
		K	inches	3/4"	3/4"
Capacity		litres	200	250	300
Power		W	3000	3000	3000
Heating time	$\Delta T$ 35° C	minutes	2 h 53'	3 h 36'	4 h 19'
	$\Delta T$ 45° C	minutes	3 h 42'	4 h 38'	5 h 34'
Weight*		Kg	51	60	72

\* Weight refer to model with copper element